



650V SiC Power Module Dual Diode Pack


| | |
|-------------|-------|
| V_{DC} | 650V |
| I_F | 2×90A |
| $T_{J,max}$ | 175°C |

Applications

- Welding equipment
- Uninterruptible power supply (UPS)
- High frequency power supply
- Induction heating
- High speed rectifiers

Features

- SiC Schottky Diode
 - Zero reverse recovery
 - Zero forward recovery
 - Temperature independent switching behavior
 - Positive temperature coefficient on V_F
- Very low stray inductance
- Low forward voltage
- Isolated package (SOT-227)
- Low noise switching
- RoHS compliant

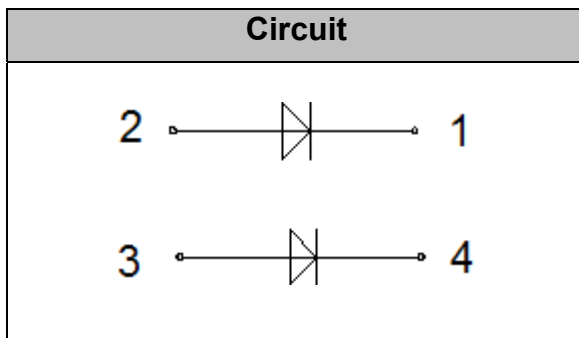

Absolute Maximum Ratings ($T_J=25^\circ\text{C}$ unless otherwise specified, per leg)

| Parameter | Symbol | Test Conditions | Value | Unit |
|---|---------------|--|-----------|----------------------|
| Peak Repetitive Reverse Voltage | V_{RRM} | $T_J=25^\circ\text{C}$ | 650 | V |
| DC Blocking Voltage | V_{DC} | $T_J=25^\circ\text{C}$ | 650 | V |
| Continuous Forward Current | I_F | $T_C=25^\circ\text{C}, T_J=175^\circ\text{C}$ | 115 | A |
| | | $T_C=75^\circ\text{C}, T_J=175^\circ\text{C}$ | 90 | |
| | | $T_C=135^\circ\text{C}, T_J=175^\circ\text{C}$ | 50 | |
| Non-Repetitive Peak Forward Surge Current | I_{FSM} | $T_C=25^\circ\text{C}, T_P=10\text{ms}, \text{Half Sine Wave}$ | 450 | A |
| I^2t Value | $\int I^2 dt$ | $T_C=25^\circ\text{C}, T_P=10\text{ms}$ | 1012 | A^2s |
| Power Dissipation | P_{Tot} | $T_C=25^\circ\text{C}$ | 277 | W |
| Junction Temperature | T_J | | -55...175 | $^\circ\text{C}$ |
| Storage Temperature | T_{STG} | | -40...125 | $^\circ\text{C}$ |

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified, per leg)

| Parameter | Symbol | Test Conditions | Value | | | Unit |
|---------------------------|--------|--|-------|------|------|---------------|
| | | | Min. | Typ. | Max. | |
| Reverse Current | I_R | $V_R=650\text{V}, T_J=25^\circ\text{C}$ | -- | 2.8 | 100 | μA |
| | | $V_R=650\text{V}, T_J=175^\circ\text{C}$ | -- | 11 | -- | |
| Forward Voltage | V_F | $I_F=90\text{A}, T_J=25^\circ\text{C}$ | -- | 1.56 | 1.8 | V |
| | | $I_F=90\text{A}, T_J=175^\circ\text{C}$ | -- | 2.07 | -- | |
| Total Capacitance | C | $V_R=0\text{V}, f=1\text{MHz}$ | -- | 3473 | -- | pF |
| | | $V_R=200\text{V}, f=1\text{MHz}$ | -- | 347 | -- | |
| | | $V_R=400\text{V}, f=1\text{MHz}$ | -- | 322 | -- | |
| Total Capacitive Charge | Q_C | $V_R=400\text{V}$ | -- | 189 | -- | nC |
| Capacitance Stored Energy | E_C | $V_R=400\text{V}$ | -- | 24 | -- | μJ |

Thermal and Package Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Conditions | Value | Unit |
|--------------------------------------|------------|------------------------|-------|---------------------------|
| Thermal Resistance, Junction to Case | R_{thJC} | Per leg | 0.54 | $^\circ\text{C}/\text{W}$ |
| Isolation Breakdown Voltage | V_{isol} | AC, 50Hz (R.M.S), T=3s | 3600 | V |
| Mounting Torque | M | Recommended (M4 screw) | 1~1.5 | Nm |
| Terminal Connection Torque | | Recommended (M4 screw) | 1~1.5 | |
| Weight | W | | 32 | g |

Typical Performance Per Leg

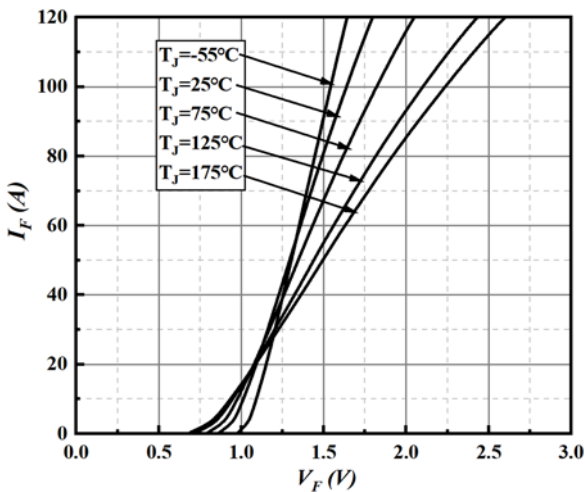


Fig1. Forward Characteristics (parameterized on T_J)

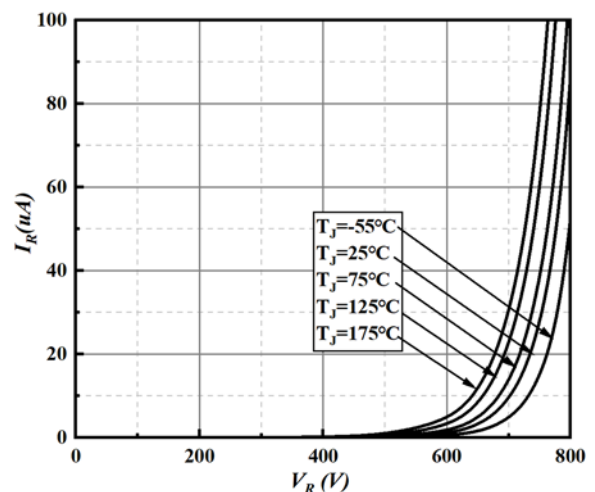


Fig2. Reverse Characteristics (parameterized on T_J)

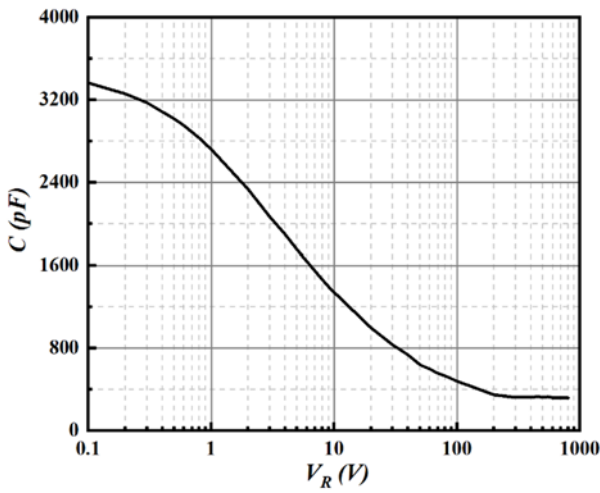


Fig3. Total Capacitance

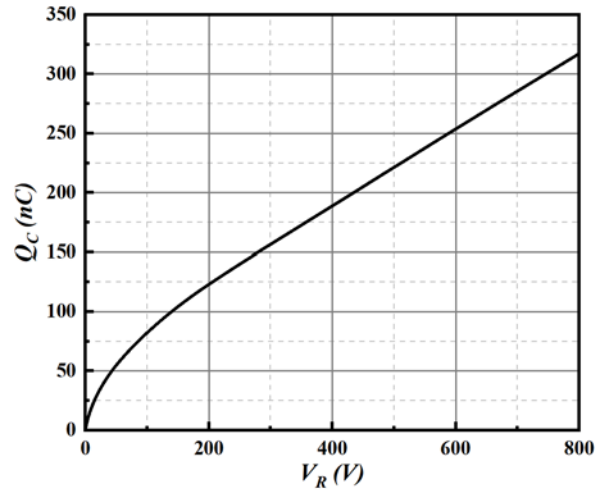


Fig4. Total Capacitive Charge

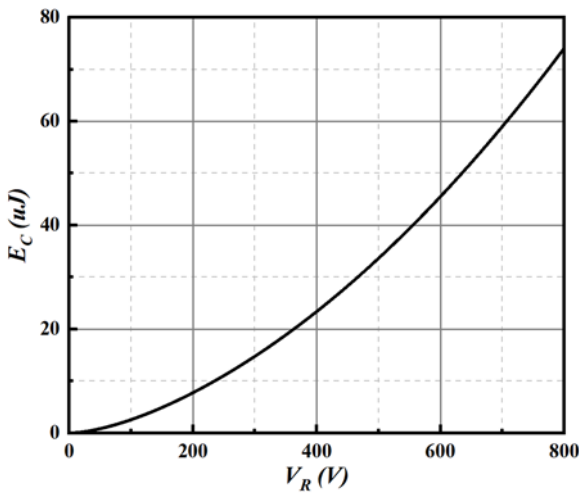


Fig5. Capacitance Stored Energy

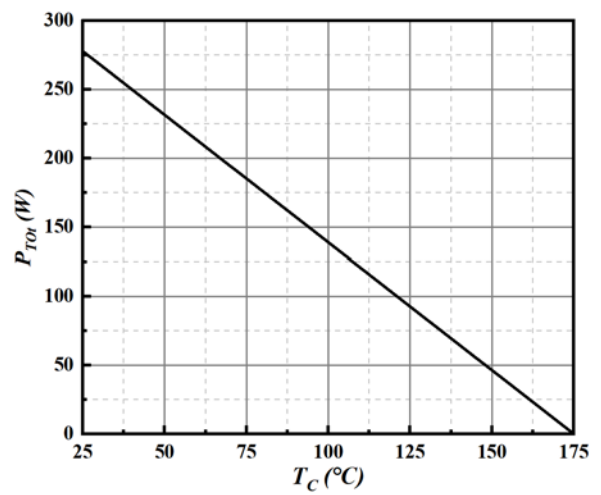


Fig6. Power Derating

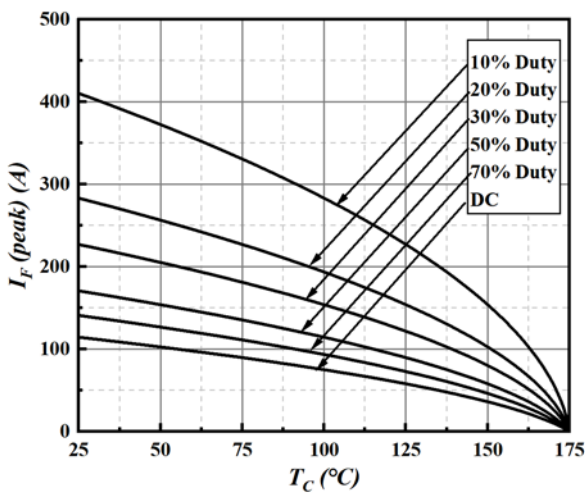


Fig7. Current Derating

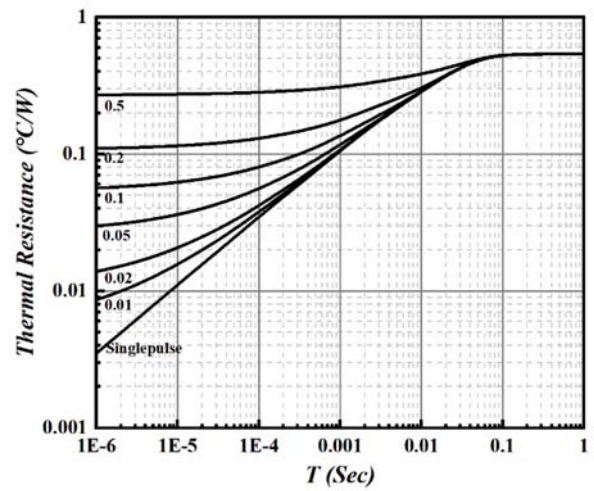


Fig8. Transient Thermal Impedance



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.